

# MicroBlue

## HIGHLIGHTS

- Entry-level microscopes for brightfield observation
- Monocular, binocular and trinocular models
- Digital and LCD models
- Back panel with smart storage solutions
- Provided with APL (Anti-bacterial Protection Layer)
- Revolving reversed nosepiece
- Integrated X-Y mechanical stage
- Dual illumination system: white & halogen colored 1 W LED or 1 W (Neo)LED™ illumination for increased light output
- Cordless operation with rechargeable AA batteries (except for the LCD models)
- Universal USB-C 5 Vdc charging port
- Multiplug 100-240 Vac / 5 Vdc adapter
- Ergonomic carrying grip
- Five years warranty



● MB.1152

## TECHNICAL SPECIFICATIONS

### EYEPIECE(S)

- Wide field WF 10x/18 mm eyepiece(s)
- Secured and with pointer for monocular versions

### HEAD

- Monocular models with 45° inclined tubes
- Binocular models have 45° inclined tubes, adjustable interpupillary distance between 48 and 75 mm and a ± 5 diopter adjustment on left tube
- Trinocular models have 30° inclined tubes, interpupillary distance is adjustable between 48 and 75 mm and equipped with a ± 5 diopter adjustment on the left tube
- The trinocular head has a fixed light path beamsplitter (50:50) and generates an erect image
- Two digital heads are available:  
An integrated 1.3 MP 1/2.5" CMOS sensor USB 2.0 camera, 1272 x 952 pixels  
An integrated 5.0 MP 1/2.8" CMOS sensor USB 2.0 camera, 2560 x 1920 pixels
- LCD version with 7" LCD screen
- All heads are 360° rotatable and secured except for the LCD head, which is secured fixed

### MONOCULAR MODEL MB.1001

298 (h) x 151 (w) x 202 mm (d) | 2.0 kg

### MONOCULAR, MECHANICAL STAGE MB.1151

298 (h) x 151 (w) x 202 mm (d) | 2.2 kg

### BINOCULAR MODEL, MECHANICAL STAGE MB.1152

298 (h) x 151 (w) x 202 mm (d) | 2.8 kg

### NOSEPIECE

Revolving nosepiece for 3 or 4 reversed objectives on ball bearings

### OBJECTIVES

- Achromatic 4x/0.10, 10x/0.25 and S40x/0.65. Models with S60X or S100x oil immersion are also available
  - The S40x, S60x and S100x oil immersion objectives are spring loaded
- All optics are anti-fungus treated and anti-reflection coated for maximum light throughput*

### FOCUSING

- Coaxial coarse and fine adjustments, 200 graduations, 15 µm per graduation, 3 mm per rotation, total travel approximately 15 mm
- Supplied with an adjustable rack stop to prevent damage to sample and objectives



Monocular head



Binocular head



Trinocular head



Digital monocular head



Digital LCD head

### STAGE

All models are supplied with 115 x 100 mm stage with integrated 55 x 20 mm X-Y mechanical stage, except for the basic model MB.1001 which is supplied with a 105 x 105 mm stage and two non-removable clamps

### CONDENSER


Height adjustable Abbe condenser N.A. 1.25 with iris diaphragm and filter holder, except for the MB.1001 model and MB.1001-LCD models which are equipped with a single N.A. 0.65 condenser with built-in iris diaphragm

### DUAL ILLUMINATION SYSTEM

- 1 W white (Neo)LED™: 6000 – 6500 K, ideal for standard observations with crisp, cool lighting
- 1 W halogen colored (Neo)LED™: 3000 – 3200 K, enhances contrast for specific applications such as transparent objects

### NEOLED™ ILLUMINATION

Binocular and trinocular models are supplied with an adjustable NeoLED™ illumination system for increased light output



- White colored and halogen colored light

### APL (ANTIMICROBIAL PROTECTION LAYER)

Using the same technology already used extensively throughout the healthcare environment in wall coatings, patient lighting, air pressure stabilization and suction liners, APL prevents the growth of unwanted microbes that can cause degradation, discoloration, staining or odors of the Euromex microscopes

### ANTI-THEFT SLOT

At the back of the microscope a Kensington Security Slot is placed, which can be used to secure the instrument from theft


### PACKAGE CONTENT

- Supplied with 100-240 Vac / 5 Vdc USB multi-plug power adapter, three rechargeable AA batteries, white filter, dust cover, user manual and for models with an S100x objective, 5 ml immersion oil
- Software, USB-2 cable (except for the LCD models) and a micrometer 1mm/100 slide are included (for camera models)
- External power supply for LCD screen
- All packed in a polystyrene box

### BACK PANEL – ORGANIZED & EFFICIENT

The MicroBlue features a revolutionary back panel with smart storage solutions:

1. 5-slide specimen holder
2. Dual tool holders
3. Built-in power supply storage
4. Storage for immersion oil
5. Dual illumination switch
6. Integrated cable roll-up system
7. USB-C power input

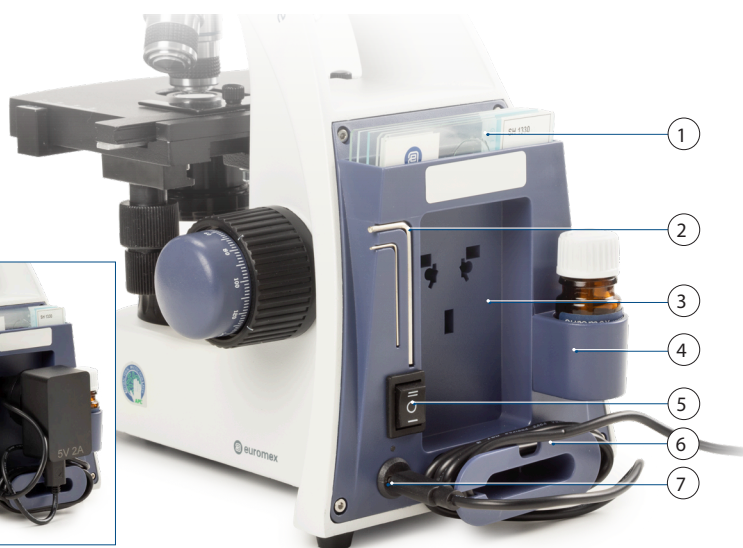

MODELS	Mono	Bino	Trino	Maximum objectives	4/10/S40x objectives	S60x objective	S100x objective	Mechanical X-Y stage	LED	NeoLED™	Batteries
MB.1001	•			3	•				•		•
MB.1051	•			4	•			•	•		•
MB.1651	•			4	•	•		•	•		•
MB.1151	•			4	•		•	•	•		•
MB.1052		•		4	•			•		•	•
MB.1652		•		4	•	•		•		•	•
MB.1152		•		4	•		•	•		•	•
MB.1053			•	4	•			•		•	•
MB.1153			•	4	•		•	•		•	•

## DIGITAL MODELS



### 1.3 MP CAMERA

- This model is equipped with a 1.3 MP CMOS USB-2 camera
- Maximum resolution 1272 x 952, 24 bits color depth, up to 30 frames per second
- Delivered with ImageFocus 4 software
- Warranty for the camera is two years



### SOFTWARE

- The ImageFocus 4 software allows to save images in .jpg, .tif, .bmp or .dicom formats as well as .avi format videos
- Measurements can be done on still and live image
- Compatible with Windows 10 and higher, both 32 and 64 bits configurations
- Mac OS-Light version is also available for capturing images
- Free updates can be downloaded on our website [www.euromex.com](http://www.euromex.com)



### 5.0 MP CAMERA

- This model is equipped with a 5.0 MP CMOS USB-2 camera
- Maximum resolution 2560 x 1920, 24 bits color depth, up to 30 frames per second
- Delivered with ImageFocus Plus software
- Warranty for the camera is two years



### SOFTWARE

- The ImageFocus Plus software allows to save images in .jpg, .tif, .bmp or .dicom formats as well as .avi format videos
- Images can be annotated and measurements can be performed in live or captured images
- Compatible with Windows 10 and higher, both 32 and 64 bits configurations
- Mac OS version is also available
- Free updates can be downloaded on our website [www.euromex.com](http://www.euromex.com)



### LCD SCREEN

All the MicroBlue LCD microscopes are equipped with 7" IPS LCD screen

- Screen resolution 1920 x 1080 @ 30 fp
- Save images and videos directly to micro SD card
- Image resolution upto 1844 x 1080 in .JPEG format
- Video resolution 1280 x 720 .AVI format
- Basic measurement function (line) with calibration. Calibration slide available as option
- Warranty for the screen is 2 years



● MB.1155

● MB.1051-LCD

MODELS	Digital LCD	Digital mono	1.3 MP	5.0 MP	Maximum objectives	4/10/540x objectives	S60x objective	S100x objective	Mechanical X-Y stage	LED	Batteries
MB.1001-LCD*	•				3	•				•	•
MB.1051-LCD*	•				4	•			•	•	•
MB.1055-5 <sup>(2)</sup>		•		•	4	•			•	•	•
MB.1655-1 <sup>(1)</sup>		•	•		4	•	•		•	•	•
MB.1655-5 <sup>(2)</sup>		•		•	4	•	•		•	•	•
MB.1155-1 <sup>(1)</sup>		•	•		4	•		•	•	•	•
MB.1155-5 <sup>(2)</sup>		•		•	4	•		•	•	•	•

\* models with LCD-screen. LCD versions do not run on batteries

<sup>(1)</sup> MB.xxxx-1 = model with a integrated 1.3 MP CMOS USB-2.0 camera

<sup>(2)</sup> MB.xxxx-5 = model with a integrated 5.0 MP CMOS USB-2.0 camera

## ACCESSORIES AND SPARE PARTS

## EYEPIECES

- AE.5571** Wide field eyepiece WF 5x/18 mm
- MB.6010** Wide field WF 10x/18 mm eyepiece
- MB.6010-P** Wide field 10x/18 mm eyepiece with pointer
- MB.6010-M** Wide field 10x/18 mm eyepiece with micrometer scale
- MB.6015** Wide field WF 15x/11 mm eyepiece
- MB.6020** Wide field WF 20x/9 mm eyepiece
- MB.6099** Pair of eyecups

## OBJECTIVES

*Achromatic, 35 mm parfocal*

- MB.7004** 4x/0.10 objective. WD 27.2 mm
  - MB.7010** 10x/0.25 objective. WD 7 mm
  - MB.7020** 20x/0.40 objective. WD 1 mm
  - MB.7040** S40x/0.65 objective. WD 0.6 mm
  - MB.7060** S60x/0.85 objective. WD 0.62 mm
  - MB.7000** S100x/1.25 objective. WD 0.15 mm
- WD = Working distance

## CAMERA ACCESSORIES

- AE.5130** Universal SLR adapter with built-in 2x lens for standard 23.2 mm tube. Needs T2 adapter
- AE.5025** T2 ring for Nikon D SLR digital camera
- AE.5040** T2 ring for Canon EOS SLR digital camera

## MISCELLANEOUS

- MB.9710** Frosted filter
- MB.9975** External mains adapter-charger 100-240 Vac/5 Vdc (50/60 Hz)
- MB.9981** 1 W LED replacement unit
- MB.9991** 1 W NeoLED™ replacement unit
- AE.5202** Blue filter, diameter 32 mm
- AE.5203** Yellow filter, diameter 32 mm
- AE.5204** Neutral grey filter, diameter 32 mm
- AE.5205** Green filter, diameter 32 mm
- AE.5207** Blue filter plexiglass, diameter 32 mm
- MB.9900** Aluminum transport case
- AE.9918** Nylon microscope bag (25 x 39 x 19 cm)
- AE.9912** Euromex dust cover medium (35 x 39 cm)

## DISPOSABLES

- PB.5155** Microscope slides 76 x 26 mm, ground edges, 50 pieces
- PB.5157-W** Microscope slides 76 x 26 mm, ground edges. White frosted side, 50 pieces per pack
- PB.5157-B** Microscope slides 76 x 26 mm, ground edges. Blue frosted side, 50 pieces per pack
- PB.5165** Cover glasses 18 x 18 mm, thickness 0.13-0.17 mm, 100 pieces
- PB.5168** Cover glasses 22 x 22 mm, thickness 0.13-0.17 mm, 100 pieces
- PB.5245** Lens cleaning paper, 100 sheets per pack
- PB.5255** Immersion oil, n = 1.515 (25 ml)
- PB.5274** Isopropyl alcohol 99% (200 ml)
- PB.5275** Cleaning kit: lens cleaning fluid, lint free lens tissue, brush, air blower, cotton swabs
- PB.5276** Microscope maintenance and servicing kit, 16 pcs: cleaning brush, 6 pcs screwdriver set, air blower, 3 pcs Allen key, 1.5, 2, 2.5 mm, lens cleaning fluid 20 ml, cleaning cloth 140 x 140 mm, 100 pcs lens tissue sheets, tube of maintenance grease, 10 ml bottle of oil, packed in a nice toolbox



● MB.9900



● AE.9918



● AE.9912


[www.euromex.com](http://www.euromex.com)